









Table of Contents

PRODUCT	PAGE #
RWD	
Mounting Devices	C-38
Accessories/Replacement Parts	C-38
Direct Mount	
Accessories	C-38
All Pneumatic Products	
Pneumatic Spring Clamp	C-39
185/195 Receiver-Controllers	
Tools	C-40
Replacement Scales	C-40
Connectors/Restrictors	C-40
Termination Strips	C-40
Replacement Parts	C-40
184 Temperature Transmitters	
Restrictors	C-41
Wells/Well Mounting Kit	C-41
Bulb Shields	C-41
Replacement Parts	C-41
141 Air Velocity Transmitters	
Restrictors	C-42
Probes	C-42

C-37

Controllers & Transmitters





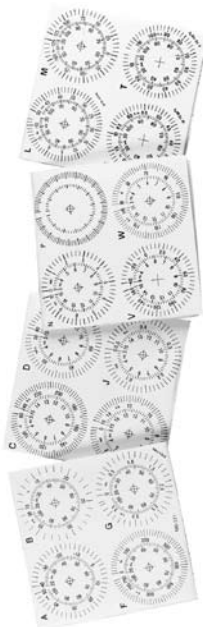
Accessories & Service Kits

	Description	Product Group	Quantity	Part No.
RWD				
	Housing Enclosure. Protective enclosure used for wall mounting.	RWD	1	ARG62.21
	Housing Barrier. For use with housing enclosure above.	RWD	1	ARG100
	Time Clock.	RWD	1	SEH62.1U
	24/120 Vac Transformer (30 VA).	RWD	1	SEM62.2U
	Controller Software Tool.	RWD	1	125-3481
Direct Mount				
	Remote Setting Unit.	Direct Mount Controllers	1	BSG21.1
	Temperature Controller Software Tool.	Direct Mount Controllers	1	ACS100.1U
	Immersion Well. 1/2" NPT x 6" long	Direct Mount Controllers	1	ARG150U

C-38

Controllers & Transmitters









Accessories & Service Kits

	Description	Product Group	Quantity	Part No.
All Pneumatic Products				
	Pneumatic Spring Clamp.	All	1	531-833
185/195 Receiver-Controllers				
	185/195 Receiver-Controller Simulator. Used for setup and calibration. Comes complete with a carrying case and the following parts:			
	• One gauge/switch assembly	185, 195	1	195-098
	• Two gauge/switch assemblies	185, 195	1	195-099
	• Three gauge/switch assemblies	185, 195	1	195-100
	• Single gauge/switch assembly (without a case)	185, 195	1	195-108
	Receiver-Controller Calibration Slide Rule. Used to calculate proportional band and control point authority.	185, 195	1	153-054
	Calibration Card. Shows transmitter pressures for various analog ranges to assist in calibration.	185, 195	1	144-022
	Setpoint Dial Sheets. Direct Acting and Reverse Acting.	195	4 Sheets	195-130
	English Units	Metric Units	Scale ID	
	-40 to +120°F	-40 to +50°C	A	
	50 to 100°F	10 to 38°C	B	
	80 to 240°F	26 to 117°C	C	
	20 to 80% RH	-18 to +38°C	D	
	0 to 100°F	1 to 58°C	E	
	35 to 135°F	0 to 750 Pa	F	
	0 to 3 W.G.	0 to 3.75 kPa	G	
	0 to 15 W.G.	20 to 80% RH	H	
	0 to 0.5 W.G.	0 to 125 Pa	J	
	Blank 10 divisions	Blank 9 divisions	K (DA)	
	Blank 16 divisions	Blank 11 divisions	K (RA)	
	-0.05 to ±0.2" W.G.	-12.5 to +50 Pa	L	
	-0.5 to +0.5" W.G.	-125 to +125 Pa	M	
0 to 10" W.G.	0 to 2.5 kPa	N		
Blank 20 divisions	Blank 15 divisions	P		
0 to 50 psi	0 to 345 kPa	R		
50 to 150°F	10 to 66°C	S		
40 to 240°F	4 to 116°C	T		
-40 to +160°F	-40 to +71°C	V		
30 to 190°F	-1 to +88°C	W		

Ordering Notes

- Add Scale ID as suffix to Part No.
- Indicate English or Metric units.












Accessories & Service Kits

	Description	Product Group	Quantity	Part No.
185/195 Receiver-Controllers				
	Receiver-Controller Restriction Kit. Includes three input restriction plates, one pilot relay restriction plate, gaskets, and two screws.	195	1 Kit	195-066
	Receiver-Controller Connector Kit. Includes two plug-in connector assemblies, one 3-barb input connector assembly.			
		• Multiple-Input	195	1 Kit
	• Single-Input	195	1 Kit	195-114
	Termination Strip. For numbered ports 1 through 10, straight through connections for 1/4" (6 mm) OD polyethylene tubing.	195	1	195-082
	Pressure Gauge. Dual Scale 0 to 30 psig (0 to 200 kPa) 12" NPT male thread (back)	184, 195	1	142-0373
	In-Line Air Filter.	195	1	908-033
	Description	Temperature Range		Part No.
184 Temperature Transmitters				
	Rigid Bulb Transmitter. Bulb 1/4" Dia. x 9" L (6 mm Dia. x 229 mm L)	35 to 135°F (2 to 57°C)		184-0001
		50 to 100°F (10 to 38°C)		184-0002
		80 to 240°F (27 to 116°C)		184-0003
		0 to 100°F (-18 to +38°C)		184-0028
	Remote Averaging Bulb Transmitter. 3/32" Dia. x 20' L (2 mm Dia. x 6.1 m L) with 12" (305 mm) Capillary	35 to 135°F (2 to 57°C)		184-0004
		0 to 100°F (-18 to +38°C)		184-0048
	Remote Bulb Transmitter. 1/4" Dia. x 4" L (6 mm Dia. x 102 mm L) 3' (0.92 m) Capillary	-40 to +120°F (-40 to +49°C)		184-0005
		50 to 100°F (10 to 38°C)		184-0018
		80 to 240°F (27 to 116°C)		184-0014
		0 to 100°F (-18 to +38°C)		184-0036
		-10 to +65°F (-23 to +18°C)		184-0015
		35 to 135°F (2 to 57°C)		184-0034
	30 to 190°F (-1 to +88°C)		184-0041	

C-40

Controllers & Transmitters

Accessories & Service Kits

	Description	Product Group	Quantity	Part No.
184 Temperature Transmitters				
	Remote Bulb Transmitter. 1/4" Dia. x 4" L (6 mm Dia. x 102 mm L) 3' (0.92 m) Armored Capillary	184	1	184-0006
	Room Transmitter. With cover and wall plate (180-443)	184	1	184-0340
	Restrictor Tees. 40 scim for 1/4" (6 mm) OD plastic. Required for 195 Receiver-Controller only when total transmitter line is greater than 300' (91 m) long.	184	Package of 5	184-114
	In-line Restrictors. 40 scim (11 ml/s)	184	Package of 5	184-117
	Well Mounting Bracket Kit.	184	1	184-105
	Copper Well. 1/4" D x 4" L (6 mm D x 102 mm L)	184	1	184-119
	Stainless Steel Well. 1/4" D x 4" L (6 mm D x 102 mm L)	184	1	184-118
	Outdoor Bulb Shield. 9" (229 mm) L	184	1	134-084
141 Air Velocity Transmitters				
	Restrictor Tees. 40 scim for 1/4" (6 mm) OD plastic. Required for 195 Receiver-Controller only when total transmitter line is greater than 300' (91 m) long.	184	Package of 5	184-114
	Static Pressure Sensor Probe.	141	1	269-062
	Static Pressure Probe Kit.	SW269	1	189-142

C-41

Controllers & Transmitters

