


PSC40AB10

Enclosed Single **40 VA** Power Supply, 120 to 24 Vac


PSC100AB10

Enclosed Single **100 VA** Power Supply, 120 to 24 Vac

AC Power Supply

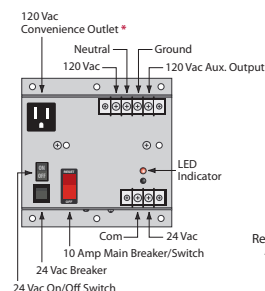

• Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.*

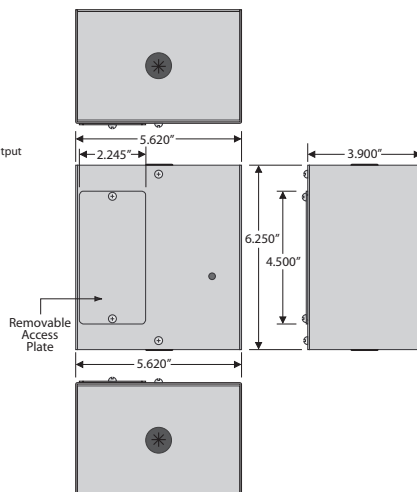

Shown
Without
Cover



Shown
With
Cover



UL
LISTED
Class 2

CE

RoHS

Made in USA
Meets
"Buy American"
of ARRA 2009

Specifications

Transformer: One 40 VA Split-Bobbin,
Inherently Limited (PSC40AB10)
One 100 VA Split-Bobbin, Circuit
Breaker (PSC100AB10)

Primary: 120 Vac

Secondary: 24 Vac, w/ LED Indicator

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets,
Aux. Output, & Transformer)**
Total Combined Output 9A

Mounting: Mounting plate included (as shown)

Approvals: Class 2 (UL Approved UL5085-3),
UL916, UL508, C-UL, CE, RoHS

Dimensions: 6.250" x 5.620" x 4.250"

Weight: 4.40 lbs. (PSC40AB10)
5.80 lbs. (PSC100AB10)

Notes:

- To order without enclosure, see PSB40AB10 & PSB100AB10.
- To order UL508, add "-IC" to end of model number.



www.hvacusa.com

Phone (877) 632-4876