

HE-67xx Series

TRUERH™ Humidity Element with Temperature Sensors


Description

The HE-67xx Series Humidity devices house both a humidity and a temperature sensor in a wall or duct-mount style. The humidity sensor is capable of measuring Relative Humidity (RH) over the entire range of 0 to 100%, and its All-Polymer™ construction provides improved resistance to chemical corrosion. The TRUERH™ product line delivers devices with RH accuracy of either ±2% or ±3% RH. TRUERH™ humidity elements produce voltage output signals proportional to measured humidity for humidity indication.

Temperature sensors are available in thin-film nickel, thin-film platinum, and silicon. The elements are powered with 14 to 30 VDC or 20 to 30 VAC and feature a user-selectable humidity output of 0 to 10 VDC or 0 to 5 VDC.

Features

- TRUERH™ circuitry and calibration techniques for which patent protection is pending
- All-Polymer humidity sensor patented sensing element provides accurate and reliable humidity sensing
- tested and calibrated with equipment certified to be in compliance with National Institute of Standards and Technology (NIST) guidelines



HE-67xx-0N0BT Wall Mount



HE-67xx-0N00P Duct Probe

TRUERH™ — True ±2% Accuracy

- ±2% RH accurate model includes test and calibration equipment certificate of calibration conformance
- humidity and temperature sensors in one unit eliminates the need for separate sensors and reduces installation costs
- user-selectable output voltage range allows choice of standard voltage outputs for use with systems in service or new systems
- all-plastic material for duct probe improves thermal performance and complies with Underwriters Laboratories Inc.® (UL) flammability ratings for plenum use; complies with Blue Angel (Germany) and TCO'95 (Sweden) environmental regulations

Repair Information

If the HE-67xx Series Humidity Element fails to operate within its specifications, replace the unit. For a replacement humidity device, contact the nearest Johnson Controls® representative.

Selection Charts

HE-67xx Series Wall Mount Models

Code Number	Description	RH Accuracy	
		±2%	±3%
HE-67P2-0N0BT	Wall mount humidity element with thin-film platinum temperature sensor	■	
HE-67S2-0N0BT	Wall mount humidity element with silicon temperature sensor	■	
HE-67N2-0N0BT	Wall mount humidity element with thin-film nickel temperature sensor	■	
HE-67P3-0N0BT	Wall mount humidity element with thin-film platinum temperature sensor		■
HE-67S3-0N0BT ¹	Wall mount humidity element with silicon temperature sensor		■
HE-67N3-0N0BT	Wall mount humidity element with thin-film nickel temperature sensor		■

1. Compatible with System 350™ Humidity Controls

HE-67xx Series Duct Probe Models

Code Number	Description	RH Accuracy	
		±2%	±3%
HE-67P2-0N00P	Duct probe humidity element with thin-film platinum temperature sensor	■	
HE-67S2-0N00P	Duct probe humidity element with silicon temperature sensor	■	
HE-67N2-0N00P	Duct probe humidity element with thin-film nickel temperature sensor	■	
HE-67P3-0N00P	Duct probe humidity element with thin-film platinum temperature sensor		■
HE-67S3-0N00P ¹	Duct probe humidity element with silicon temperature sensor		■
HE-67N3-0N00P	Duct probe humidity element with thin-film nickel temperature sensor		■

1. Compatible with System 350™ Humidity Controls

Accessories for HE-67xx Wall Mount Models¹

Code Number	Description
GRD10A-608	Plastic Guard with Baseplate and Mounting Ring
T-4000-119	Allen-head Tool (30/bag)
TE-1800-9600	Wall Plate Adaptor Kit required for wallbox mounting

1. Accessories are available for the wall mount model only.


A MechTronics Controls Company

www.hvacusa.com
Phone (877) 632-4876


HE-67xx Series TRUERH™ Humidity Element with Temperature Sensors (Continued)

Technical Specifications

HE-67xx Series TRUERH™ Humidity Element with Temperature Sensors		
Power Requirements	14 to 30 VDC or 20 to 30 VAC at 50/60 Hz, Class 2	
Current Draw	3 mA with no load, 25 mA maximum	
Acceptable Wire Gauge	16 to 24 AWG (18 AWG recommended)	
Humidity Element at 77°F (25°C)	Signal	0 to 5 VDC or 0 to 10 VD, 1,000 ohm maximum load
	Accuracy	HE-67x2: ±2% RH for 20 to 80% RH at 77°F (25°C) ±4% RH for 10 to 20% and 80 to 90% RH at 77°F (25°C) HE-67x3: ±3% RH for 20 to 80% RH at 77°F (25°C) ±5% RH for 10 to 20% and 80 to 90% RH at 77°F (25°C)
	Temperature Coefficient	0.1 to 0.05% RH/°C at 5°C (41°F) to -0.07 to -0.21% RH/°C at 65°C (149°F)
	Response Time	Within 5% RH of actual in 15 minutes for 10 to 30%, 30 to 90%, and 40 to 90% RH
Temperature Sensors	Thin-film Nickel	Accuracy: ±0.34°F (0.18°C) at 70°F (21°C) Reference Resistance: 1000 ohms at 70°F (21°C) Resistance Change: Approximately 3 ohms/°F (5 ohms/°C)
	Silicon	Accuracy: ±1°F (0.6°C) at 70°F (21°C) Reference Resistance: 1035 ohms at 77°F (25°C) Resistance Change: Approximately 4 ohms/°F (8 ohms/°C)
	Thin-film Platinum	Accuracy: ±0.65°F at 70°F (±0.36°C at 21°C) Reference Resistance: 1000 ohms at 32°F (0°C) Resistance Change: Approximately 2 ohms/°F (4 ohms/°C)
Electrical Connections	3-position and 2-position screw terminal blocks	
Ambient Operating Conditions	32 to 140°F (0 to 60°C) 0 to 100% RH, 85°F (29.4°C) maximum dew point	
Survival Operating Conditions	-20 to 140°F (-29 to 60°C) 0 to 100% RH, 85°F (29.4°C) maximum dew point	
Ambient Storage Conditions	-40 to 140°F (-40 to 60°C) 0 to 100% RH, 85°F (29.4°C) maximum dew point	
Materials	Wall Mount	Beige plastic cover with metal base and metal foil face plates
	Duct Probe	White plastic cover with dark gray plastic housing and probe
Dimensions	Wall Mount (H x W x D)	1.81 x 2.12 x 3.12 in. (46 x 54 x 79 mm)
	Duct Probe (H x W x D)	3.28 x 3.25 x 8.27 in. (83 x 83 x 210 mm) Probe (L x D): 6.25 x 0.98 in. (159 x 25 mm)
Agency Compliance	Duct Probe Material	94-5V flammability rated per UL 94

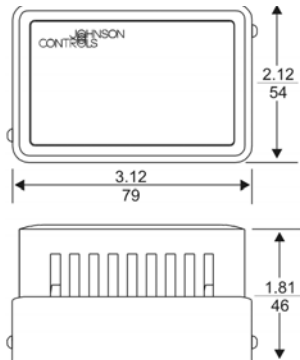

Wall Mount Humidity Element Dimensions, in. (mm)

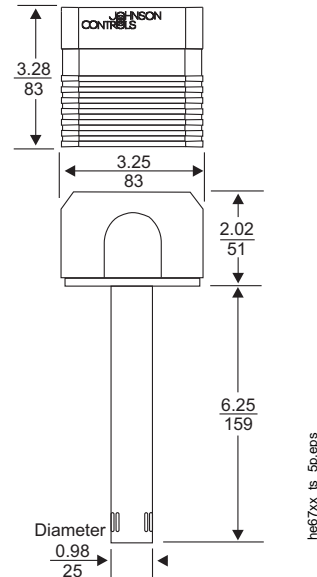

Duct Probe Humidity Element Dimensions, in. (mm)